

MODE[®]

Ergonomic Electrical
Accessories





MODE®

A Stylish, Contemporary & Flexible Range of Smooth Profile Wiring Accessories



Antimicrobial Certified Products

All white moulded and Mode® Part M™ wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella and Klebsiella Pneumoniae.

Contents

Switches	f5
Back Boxes	f9
Power Socket Outlets	f12
13A Fused Connection Units	f16
Control Switches	f17
Ceiling Accessories	f21
Socket & Blank Plates	f22
Telephone & Data Sockets	f24
TV & Satellite	f25
New Media™ Plates	f26
Patress Boxes	f27
Dry Lining Boxes	f28

There are many crucial elements of any interior design – the more obvious ones are décor and furnishings. Less obvious but no less important are electrical accessories; particularly wall accessories which, by their very nature need to be located in prominent line of sight positions.

When selecting wiring accessories designers have often compromised their schemes as they have been unable to identify a suitably flexible solution to satisfy their ideas.

Mode® accessories can now provide that flexibility with a comprehensive selection of products ranging from the humble light switch and socket outlet through to more specialised products dealing with the very latest developments in telephone and satellite products.

Mode® accessories have been conceived and developed as a high quality, flexible and modern solution to virtually any domestic wiring requirement. The smooth, modern lines of the Mode® accessory plate will fit easily into traditional and contemporary designs alike. The modular design of Mode® allows designers and installers unprecedented flexibility in creating dedicated wiring solutions to deal specifically with actual wiring needs. In other words, there is now no need to compromise Mode® accessories provide the complete solution to modern wiring needs.

20 YEAR No Quibble Guarantee

All Mode® accessories are covered by our straight forward 'No Quibble Guarantee' against any fault in materials or manufacture experienced at any time within 20 years of the date of supply.

Screw Caps

All Mode® accessories are supplied with screw caps as standard, offering you a protective and decorative option should you wish to use them.



Switches

10AX Plate Switches (Modular)
 10AX Architrave Switches (Modular)
 Dimmer Switches | Control Switches
 45A Switches | 50A Pull Switch

The range of Mode® switches described in the following pages has been developed largely as a modular range based on the large selection of Polar™ white coloured switch modules available in the Minigrid™ module range - see opposite page.

These same modules are fully interchangeable in other Click® accessory ranges such as Metal Clad, Deco® & Define® decorative metal as well as the Polar™ moulded range.

Simple, single screw fixing of modules offers the simplest possible means of installing and replacing modules.

Dedicated media transfer plates and modules are dealt with in the later pages of this catalogue in the New Media™ section.

MINIGRID®



The products illustrated in this section of the catalogue are finished plates and unfurnished mounting plates.

For comprehensive information on the full range of modules available please refer to our Minigrid™ product brochure.



CMA010/CMA011

CMA012


CMA013

CMA9014



CMA019

CMA105

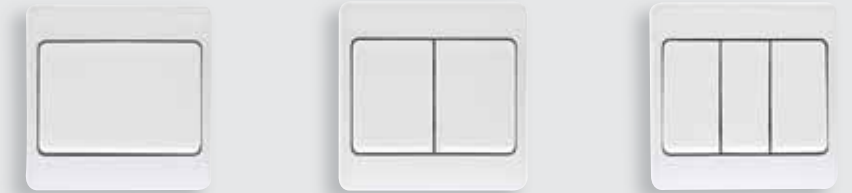

CMA811 / CMA828

CMA812

CMA813

MINIGRID® For the complete range of Minigrid™ modules, see the dedicated Minigrid™ section, page j18.

Plates Switches - MiniGrid™

CMA010	10AX 1 Gang 1 Way Plate Switch
CMA011	10AX 1 Gang 2 Way Plate Switch
CMA012	10AX 2 Gang 2 Way Plate Switch
CMA013	10AX 3 Gang 2 Way Plate Switch
CMA019	10AX 4 Gang 2 Way Plate Switch
CMA105	10AX 6 Gang 2 Way Plate Switch

Switch modules interchangeable with Minigrid™ modules in Polar™ white (PW) finish.

Wide Rocker Switches - Non Modular

CMA811	10AX 1 Gang 2 Way Wide Rocker Switch
CMA812	10AX 2 Gang 2 Way Wide Rocker Switch
CMA813	10AX 3 Gang 2 Way Wide Rocker Switch
CMA825	10AX 1 Gang Wide Rocker Intermediate Switch
CMA828	10AX 1 Gang 2 Way Wide Rocker Retractive Switch

Plates Switches - Non Modular

CMA9014	10AX 4 Gang 2 Way Single Plate Switch
----------------	---------------------------------------

Standards: BS EN 60669

Back Box Depth: 16mm Minimum Cable Size: 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm² Maximum

Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), 2 Gang: (146mm x 86mm x 9.5mm)



CMA025



CMA026



CMA171



CMA172



CMA027



CMA110

MINIGRID® For the complete range of Minigrid™ modules, see the dedicated Minigrid™ section, page j18.

Plates Switches

- CMA025** 10AX 1 Gang Intermediate Plate Switch
- CMA026** 10AX 1 Gang 2 Way Key Switch
- CMA027** 10AX 1 Gang 1 Way Retractive 'Bell' Switch
- CMA110** 10AX 1 Gang DP 'Emergency Test' Key Switch

Switch modules interchangeable with Minigrid™ modules in Polar™ white (PW) finish.

Architrave Switches - MiniGrid™

- CMA171** 10AX 1 Gang 2 Way Architrave Switch
- CMA172** 10AX 2 Gang 2 Way Architrave Switch

Mode® architrave plates are suitable for flush mounting using the WA671 and WA671 steel knock out boxes or for surface mounting the dedicated architrave back boxes CMA175 & CMA176 can be used.

The architrave switch plates will not accept MD070 & MD075 3 position switch modules.

Standards: BS EN 60669
 Back Box Depth: 16mm Minimum Cable Size: 4 x 1.5mm² / 2 x 2.5mm² / 1 x 6mm²
 Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), 171: (85mm x 30mm x 9.5mm), 172: (145mm x 30mm x 9.5mm)



CMA401



CMA402




CMA403




CMA404



CMA406

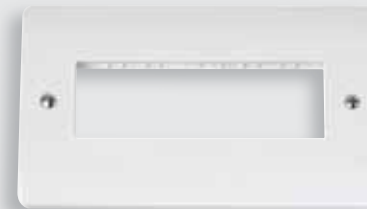

CMA426

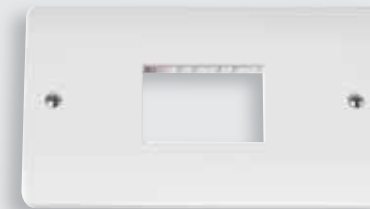

CMA432


MINIGRID® For the complete range of Minigrid™ modules, see the dedicated Minigrid™ section, page j18.

Unfurnished Plates - MiniGrid™

- CMA401** 1 Gang MiniGrid™ Unfurnished Plate - 1 Aperture
- CMA402** 1 Gang MiniGrid™ Unfurnished Plate - 2 Apertures
- CMA403** 1 Gang MiniGrid™ Unfurnished Plate - 3 Apertures
- CMA404** 2 Gang MiniGrid™ Unfurnished Plate - 2 x 2 Apertures
- CMA406** 2 Gang MiniGrid™ Unfurnished Plate - 2 x 3 Apertures
- CMA426** 2 Gang MiniGrid™ Unfurnished Plate - 6 In-Line Apertures
- CMA432** 2 Gang MiniGrid™ Unfurnished Plate - 3 Apertures

Switch modules interchangeable with Minigrid™ modules in Polar™ white (PW) finish.

Back Box Depth: Dependant on modules used Cable Size: Dependant on modules used
 Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), 2 Gang: (146mm x 86mm x 9.5mm)



CMA612



CMA618



MINIGRID®

The furnished plate shown here contains a selection of both single and twin width Minigrid™ modules. The yoke 'GR101' is supplied enabling Minigrid™ modules to be mounted prior to assembling the front plate.

MINIGRID® GR101 yokes supplied complete with the frontplate. Also available as a spare. For the complete range of Minigrid™ modules, see the dedicated Minigrid™ section, page j18.

2 Tier Unfurnished Plates - MiniGrid™

CMA612 2 Tier MiniGrid™ Unfurnished Plate & Yokes - 12 Apertures - Mode®

3 Tier Unfurnished Plates - MiniGrid™

CMA618 3 Tier MiniGrid™ Unfurnished Plate & Yokes - 18 Apertures - Mode®

Decorative Finished Deco® Victorian Plate Finishes Also Available.
Switch modules interchangeable with Minigrid™ modules in Polar™ white (PW) finish.

Back Box Depth: 47mm Minimum Cable Size: Dependant on module used
Dimensions: 12 Module: (146mm x 153mm x 9.5mm) 18 Module: (143mm x 214mm x 9.5mm)



WA512



WA518

MINIGRID® Galvanised steel back boxes supplied for flush mounting of the large Minigrid™ plates.

Galvanised Steel Back Boxes

WA512 2 Tier 47mm Deep K.O. Box

WA518 3 Tier 47mm Deep K.O. Box

Dimensions: WA512: 137mm x 137mm WA518: 137mm x 197mm



CMA140, CMA145, CMA145PL



CMA146, CMA146PL



CMA147, CMA147PL



CMA148, CMA148PL

Dimmer Modules

- MD9010 1-10V Analogue Dimmer Module (25 x 62mm)
- MD9001 6A 2 Way Push On/Off (Non-Dimming) Module (25 x 62mm)
- MD9022 250W 2 Way Dimmer Module (25 x 62mm)
- MD9042 400W 2 Way Dimmer Module (25 x 62mm)
- MD9014 100W Dual Mode Dimmer Module with Trim (26.5 x 55mm)
- SP900 Dimmer M10 Nut Runner Tool



MD9001

We recommend the use of branded halogen lamps with all Mode® dimmers. The use of inferior, non-branded lamps may require the nominal rating of the dimmer to be reduced. These dimmer switches have not been designed for use with LED lamps. However, they may be suitable for some good quality LED lamps. For further information please contact the Click® technical support team.

Dimmer Switches

- CMA140 1 Gang 2 Way 400Va Dimmer Switch
- CMA145 1 Gang 2 Way 250Va Dimmer Switch
- CMA146 2 Gang 2 Way 250Va Dimmer Switch
- CMA147 3 Gang 2 Way 250Va Dimmer Switch
- CMA148 4 Gang 2 Way 250Va Dimmer Switch

Dimmer Mounting Unfurnished Plates

- CMA145PL 1 Gang Dimmer Plate & Knob (650W Max) - 1 Aperture
- CMA146PL 2 Gang Dimmer Plate & Knobs (800W Max) - 2 Apertures
- CMA147PL 3 Gang Dimmer Plate & Knobs (1200W Max) - 3 Apertures
- CMA148PL 4 Gang Dimmer Plate & Knobs (1600W Max) - 4 Apertures

Use the nut runner SP900 to easily exchange dimmer modules and create customised dimmer switch plate.

Standards: BS EN 60669, BS EN 55015 Type: Leading Edge MD9014: Leading and trailing edge
 Back Box Depth: 25mm Minimum Cable Size: 2 x 1.5mm²
 Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), 2 Gang: (146mm x 86mm x 9.5mm)

Power Socket Outlets, Fused Connection Units & Control Switches


All Mode® 13A sockets and fused connection units are tested and approved to BS1363 offering assured quality and safety.

The provision of large twin earth terminals on our Two Gang sockets and fused connection units greatly facilitates wiring and installation.

The Mode® range offers a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...

- 13A Wall Socket Outlets | Round Pin
- Wall Socket Outlets | Fused Connection Units
- Fan Isolation Switches | DP Switches



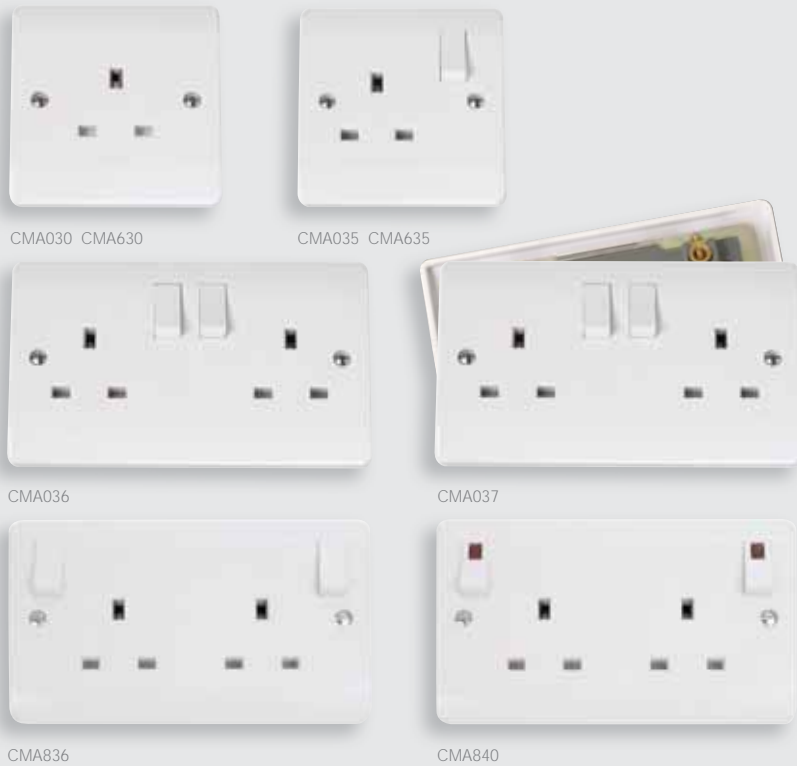


Unswitched Socket Outlets

- CMA030 13A 1 Gang Unswitched Socket
- CMA032 13A 2 Gang Unswitched Socket

Switched Socket Outlets

- CMA035 13A 1 Gang DP Switched Socket
- CMA036 13A 2 Gang DP Switched Socket
- CMA037 13A 2 Gang DP Switched Clean Earth Socket
- CMA630 13A 1 Gang Socket With Twin Earth Terminals
- CMA635 13A 1 Gang DP Switched Socket With Twin Earth Terminals
- CMA836 13A 2 Gang DP Switched Socket With Outboard Rockers
- CMA840 13A 2 Gang DP Switched Socket With Outboard Rockers & Neons
- CMA836PWRD 13A 2 Gang DP Switched Socket With Outboard Red Rockers

Standards: BS 1363
 Back Box Depth: 25mm Minimum Cable Size: 4 x 2.5mm² / 2 x 4mm²
 Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), 2 Gang: (146mm x 86mm x 9.5mm)

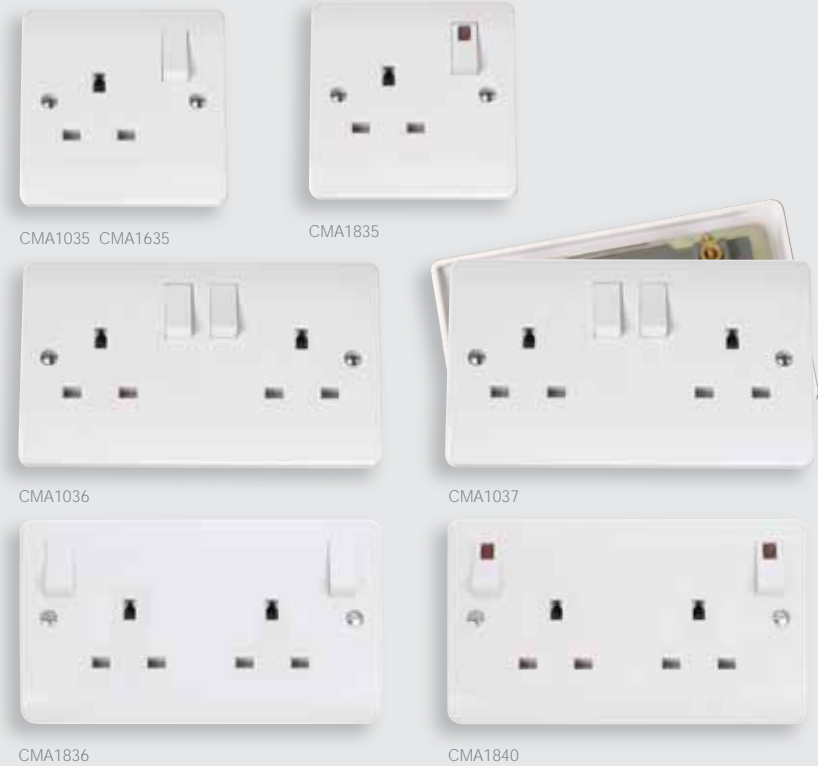


Safety Shutter Socket Outlets

- CMA1035 13A 1 Gang DP 3 Pin Safety Shutter Switched Socket
- CMA1036 13A 2 Gang DP 3 Pin Safety Shutter Switched Socket (Twin Earth)
- CMA1037 13A 2 Gang DP 3 Pin Safety Shutter Switched Clean Earth Socket
- CMA1635 13A 1 Gang DP 3 Pin Safety Shutter Switched Socket (Twin Earth)
- CMA1835 13A 1 Gang DP 3 Pin Safety Shutter Switched Socket With Neon
- CMA1836 13A 2 Gang DP 3 Pin Safety Shutter Switched Socket With Outboard Rockers (Twin Earth)
- CMA1840 13A 2 Gang DP 3 Pin Safety Shutter Switched Socket With Outboard Rockers & Neons (Twin Earth)


Standards: BS 1363
 Back Box Depth: 25mm Minimum Cable Size: 4 x 2.5mm² / 2 x 4mm²
 Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), 2 Gang: (146mm x 86mm x 9.5mm)



CMA034




CMA038



CMA039



CMA935
Non-standard socket

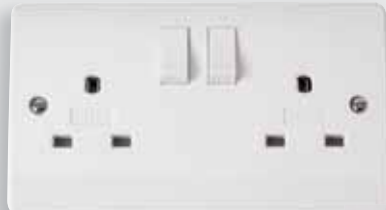

CMA936
Non-standard socket



CMA675



PA380WH
Non-standard plug



CMA736



CMA735



CMA771U



CMA770



CMA780

Round Pin Socket Outlets

- CMA034 15A Switched Round Pin Socket
- CMA038 5A Round Pin Socket
- CMA039 2A Round Pin Socket

Lockable Socket

- CMA675 13A 1G DP Key Lockable Socket With Neon

Non-Standard Socket Outlets

- CMA935 13A 1 Gang DP Switched Non-Standard Socket
- CMA936 13A 2 Gang DP Switched Non-Standard Socket

Non-Standard Resilient Plug Tops

- PA380WH 13A Fused Non-Standard Plug - White
- PA380RD 13A Fused Non-Standard Plug - Red

For use with non-standard Click® Mode sockets CMA935 and CMA936

Locating Plug Sockets

- CMA735 13A 1 Gang DP Switched Locating Plug Socket
- CMA736 13A 2 Gang DP Switched Locating Plug Socket With Outboard Rockers

Switched Sockets With USB Outlets

- CMA771U 13A 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
- CMA770 13A 2 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
- CMA780 13A 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)

Standards: BS 546, BS 1363 675: BS 1363-2, BS EN 60669-1
 Back Box Depth: 25mm Minimum 675: 35mm Minimum
 Cable Size: 2A: 2 x 2.5mm² / 3 x 1.5mm² 13A: 4 x 2.5mm² / 2 x 4mm² 675: 3 x 2.5mm², 2 x 4mm²
 Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), 2 Gang: (146mm x 86mm x 9.5mm)

Standards: 735, 736: BS 1363, 770, 780, 771U: BS1363-2: 2016 +A1: 2018, BS EN 62368-1 BS EN 62680-1-1
 Back Box Depth: 25mm Minimum Cable Size: 4 x 2.5mm² / 2 x 4mm²
 Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), 2 Gang: (146mm x 86mm x 9.5mm)



CMA649/ CMA650



CMA651



CMA652



CMA653



CMA049/CMA050



CMA051



CMA052



CMA053



CMA020



CMA021



CMA024



CMA620

Fused Connection Units With Optional Flex Outlet Through The Bottom

- CMA049 3A Fused Connection Unit
- CMA050 13A Fused Connection Unit
- CMA051 13A Switched Fused Connection Unit
- CMA052 13A Switched Fused Connection Unit With Neon
- CMA053 13A Fused Connection Unit With Neon

Fused Connection Units Without Flex Outlet

- CMA649 3A Fused Connection Unit
- CMA650 13A Fused Connection Unit
- CMA651 13A Switched Fused Connection Unit
- CMA652 13A Switched Fused Connection Unit With Neon
- CMA653 13A Fused Connection Unit With Neon

Fan Isolation Switch

- CMA020 10A 3 Pole Fan Isolation Switch
- CMA021 10A 3 Pole Isolation Switch

20A DP Sink/Bath Switch

- CMA024 20A DP Sink/Bath Switch With Neon
- 3 pole and 20A DP switches are non-modular

20A Keyfob Switch

- CMA620 20A Keyfob Switch
- SP940 Spare Keyfob For CMA620

Standards: BS 1363 and BS 1362 (fuse)
 Back Box Depth: 25mm Minimum Cable Size: 3 x 2.5mm² or 2 x 4mm²
 Dimensions: 1 Gang: (86mm x 86mm x 9.5mm)

Standards: BS EN 60669
 Back Box Depth: 25mm Minimum Cable Size: 20A DP: 4 x 2.5mm² 10A 3P: 1 x 2.5mm² / 2 x 1.5mm²
 Dimensions: 1 Gang: (86mm x 86mm x 9.5mm)



CMA022

CMA023

CMA044



CMA046

CMA660

CMA622



CMA623

CMA040

CMA042

20A Control Switches With Optional Flex Outlet Through The Bottom

- CMA022 20A DP Switch
- CMA023 20A DP Switch With Neon
- CMA044 20A DP 'Water Heater' Switch With Flex Outlet
- CMA046 20A DP 'Water Heater' Switch With Flex Outlet & Neon

20A Control Switch Without Flex Outlet

- CMA622 20A DP Switch
- CMA623 20A DP Switch With Neon
- CMA040 20A DP 'Water Heater' Switch
- CMA042 20A DP 'Water Heater' Switch With Neon

Lockable Switch

- CMA660 20A Double Pole Key Lockable Switch

Standards: BS EN 60669 660: BS 1363-2, BS EN 60669-1
 Back Box Depth: 25mm Minimum 660: 35mm Minimum Cable Size: 4 x 2.5mm² 660: 3 x 2.5mm², 2 x 4mm²
 Dimensions: 1 Gang: (86mm x 86mm x 9.5mm)



CMA200

CMA201



CMA204

CMA202



CMA205

CMA203

45A Switches

- CMA200 45A 1 Gang DP Switch
- CMA201 45A 1 Gang DP Switch With Neon
- CMA202 45A 2 Gang DP Switch
- CMA203 45A 2 Gang DP Switch With Neon

Cooker Control Units

- CMA204 45A 2 Gang DP Switch With 13A DP Switched Socket
- CMA205 45A 2 Gang DP Switch With 13A DP Switched Socket & Neons

Standards: BS 4177, BS EN 60669
 Back Box Depth: 35mm Minimum Cable Size: 45A: 1 x 16mm²
 Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), 2 Gang: (146mm x 86mm x 9.5mm)



CMA500



CMA501



CMA504



CMA505



CMA502



CMA503



PRW208



PRW210/
PRW211



PRC009



CMA213



PRC210



PRW213



PRC216

essentials™ Decorative covers available for PRC210, see Essentials™ page m28

45A Switches - White Rockers

- CMA500** 45A 1 Gang DP Switch With White Rocker
- CMA501** 45A 1 Gang DP Switch With White Rocker & Neon
- CMA502** 45A 2 Gang DP Switch With White Rocker
- CMA503** 45A 2 Gang DP Switch With White Rocker & Neon

Cooker Control Units - White Switches

- CMA504** 45A 2 Gang DP Switch With 13A DP Switched Socket & White Rockers
- CMA505** 45A 2 Gang DP Switch With 13A DP Switched Socket, White Rockers & Neons

Pull Cord Switches

- PRW208** 10A 3 Pole Fan Isolation Pull Cord Switch
- PRW210** 45A DP Pull Cord Switch With Mechanical 'On/Off' & Neon
- PRW211** 50A DP Pull Cord Switch With Mechanical 'On/Off' & Neon
- PRW213** 50A DP Round Pull Cord Switch With Mechanical 'On/Off', Neon & Pattress
- CMA213** 50A DP Round Pull Cord Switch With Mechanical 'On/Off', Neon & Pattress

Pull Cord Switches

- PRC009** 10AX 2 Way Ceiling Pull Cord Switch
- PRC210** 10AX 2 Way Pull Cord Switch
- PRC216** 16A DP Pull Cord Switch With Neon

Standards: BS EN 60669, BS 4177
 Back Box Depth: 35mm Minimum Cable Size: 45A: 1 x 16mm²
 Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), 2 Gang: (146mm x 86mm x 9.5mm)


Standards: BS EN 60669
 Cable Size: 009, 208, 210: 3 x 2.5mm² / 1 x 6mm² 211: 2 x 6mm² / 1 x 25mm² 213: 2 x 6mm² / 1 x 25mm² 216: 3 x 1.5mm² / 2 x 2.5mm²
 Dimensions: PRC009: 75.5mm Dia. x 43.5mm PRC210/216: 70mm Dia. x 42mm PRW208: 86mm x 86mm x 43mm
 PRW210/211: 86mm x 86mm x 43mm PRW213: 100mm Dia. x 77mm



CMA215



PRW217



CMA060



CMA100

Click® dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5: 2010 making it safe for use in bathrooms. Shaver outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet

Flex Outlet Plates

CMA017 20A Flex Outlet Plate

45A Cooker Connection Plates

CMA215 45A 1 Gang Cooker Connection Plate

45A Cooker Outlet Plates

PRW217 45A Easyfit Dual Appliance Outlet Plate

Pattress Box for PRW217 - Urea

PRW218 35mm Deep Pattress Box For Use With PRW217

Dual Voltage Shaver Socket

CMA100 115/230V Dual Voltage Shaver Socket

Blank Plates

CMA060 1 Gang Blank Plate

CMA061 2 Gang Blank Plate

Standards: 100: BS EN 61558 017/215/217: BS 5733
 Back Box Depth: 017: 16mm min 100: 47mm min 215: 35mm min 217: 25mm min
 Cable Size: 215: 2 x 10mm² 100: 2 x 1.5mm² / 1 x 2.5mm² 017: 1 x 6mm² / 4 x 2.5mm² 217: 1 x 10mm²
 Dimensions: 215: 86mm x 86mm x 22.5mm 217: 84mm x 130mm x 27mm

TV, Telephone & Data Sockets

Providing the means to facilitate the connection of modern communications equipment is as important today as it is to provide the electrical power to operate them.

This section of the catalogue is devoted to the New Media™ range of plate accessories which includes products for connecting telephone, computer, television and satellite devices.



RJ11 Outlet | UK Telephone Outlets
 Satellite Socket Outlets | Coaxial Sockets





CMA115 / CMA131



CMA132



CMA122 / CMA127



CMA119 / CMA124

RJ11 Telephone Outlet

CMA115 Single RJ11 (Irish/US) Outlet

RJ45 Data Outlets

CMA131 Single RJ45 Cat-5e Outlet

CMA132 Twin RJ45 Cat-5e Outlet

Telephone Outlets

CMA119 Single Telephone Outlet - Master

CMA122 Twin Telephone Outlet - Master

CMA124 Single Telephone Outlet - Secondary

CMA127 Twin Telephone Outlet - Secondary

Twin outlets are 2 separate sockets and not internally linked together.

Back Box Depth: 25mm Minimum 115: 35mm Minimum Termination Type: IDC
Dimensions: 1 Gang: (86mm x 86mm x 9.5mm)



CMA065



CMA066



CMA156



CMA170



CMA157



CMA158



CMA159

Non-Isolated Coaxial Outlets (Unshielded)

CMA065 Single Coaxial Outlet

CMA066 Twin Coaxial Outlet

Isolated Coaxial Outlets (Unshielded)

CMA158 Single Coaxial Outlet

CMA159 Twin Isolated Coaxial Outlet

Satellite Outlets (Unshielded)

CMA157 Isolated Satellite & Isolated Coaxial Outlet

CMA170 Non-Isolated Satellite & Non-Isolated Coaxial Outlet


CMA156 Non-Isolated Single Satellite Outlet

Isolated outlets will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Back Box Depth: 16mm Minimum
Dimensions: 1 Gang: (86mm x 86mm x 9.5mm)



CMA310

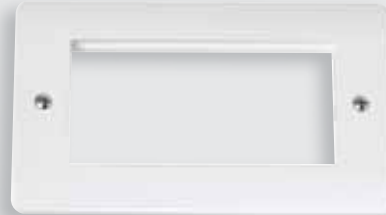

CMA312



CMA311



MM410BK MM405WH MM501BK MM440BK



For a complete range of New Media™ modules please see our dedicated New Media™ section.

Unfurnished Plates - New Media™

- CMA310** 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- CMA311** 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- CMA312** 2 Gang New Media™ Unfurnished Plate - 4 Apertures

Selecting from a range of module inserts covering all manner of media transfer, the installer will now be able to configure their own arrangement of TV, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates, fitted onto standard switch and socket boxes.

All New Media™ plates are suitable for use with standard euro module inserts.

Back Box Depth: Dependant on module used
Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), 2 Gang: (146mm x 86mm x 9.5mm)



CMA080



CMA082




CMA083



CMA084



CMA089



CMA091



CMA175



CMA176

essentials™

For the complete range of back boxes see Essentials™ page m7.

Moulded Pattress Boxes

- CMA080** 1 Gang 16mm Deep Pattress Box With Earth Terminal
- CMA081** 1 Gang 25mm Deep Pattress Box
- CMA082** 2 Gang 25mm Deep Pattress Box
- CMA083** 1 Gang 35mm Deep Pattress Box
- CMA084** 2 Gang 35mm Deep Pattress Box
- CMA085** 1 Gang 47mm Deep Pattress Box With Earth Terminal
- CMA086** 2 Gang 47mm Deep Pattress Box Fitted With Cable Restraint & Earth Terminal
- CMA089** Dual Accessory 29mm Deep Pattress Box With Earth Terminal

Architrave Pattress Boxes

- CMA175** 1 Gang 19mm Deep Architrave Pattress Box with Earth Terminal
 - CMA176** 2 Gang 19mm Deep Architrave Pattress Box with Earth Terminal
- For Mode® products only

PVC Pattress Boxes

- CMA230** 1 Gang 29mm Deep PVC Pattress Box - Trunking
- CMA235** 2 Gang 29mm Deep PVC Pattress Box - Trunking
- CMA240** 1 Gang 29mm Deep PVC Pattress Box - Conduit
- CMA245** 2 Gang 29mm Deep PVC Pattress Box - Conduit

Converter Pattress Box

- CMA091** 1 Gang To 2 Gang 16mm Deep Converter Pattress



WA095




WA102



WA106P



WA107P



GA100



WA4247

essentials™ For the complete range of back boxes see Essentials™ page m4.
 For the complete range of FlameGuard® back boxes see Essentials™ page m8.

Galvanised Steel Back Boxes

- WA092 1 Gang 16mm Deep Galvanised Steel K.O. Box
- WA093 1 Gang 25mm Deep Galvanised Steel K.O. Box
- WA094 2 Gang 25mm Deep Galvanised Steel K.O. Box
- WA095 1 Gang 35mm Deep Galvanised Steel K.O. Box
- WA096 2 Gang 35mm Deep Galvanised Steel K.O. Box
- WA097 1 Gang 47mm Deep Galvanised Steel K.O. Box
- WA098 2 Gang 47mm Deep Galvanised Steel K.O. Box
- WA099 1 + 1 35mm Deep Dual Accessory Box
- WA102 1 + 2 35mm Deep Dual Accessory Box
- WA671 1 Gang 25mm Deep Architrave Box With 60.3mm Hole Centres
- WA672 2 Gang 25mm Deep Architrave Box With 120.6mm Hole Centres

'Ezylink' Dry Lining Box Connector

- GA100 'Ezylink' Dry Lining Box Connector

Dry Lining Boxes

- WA087P 1 Gang 35mm Deep Dry Lining Box
- WA088P 2 Gang 35mm Deep Dry Lining Box
- WA106P 1 Gang 47mm Deep Dry Lining Box
- WA107P 2 Gang 47mm Deep Dry Lining Box
- WA108P Round Ceiling 34mm Deep Dry Lining Box

FlameGuard® Dry Lining Boxes

- WA4135 1 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4235 2 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4147 1 Gang 47mm Deep FlameGuard® Dry Lining Box
- WA4247 2 Gang 47mm Deep FlameGuard® Dry Lining Box