

**Part M Range™**

Visually Contrasting  
Wiring Accessories





## Part M Range™

Visually Contrasting Wiring Accessories



## Antimicrobial Certified Products

All white moulded and Mode® Part M™ wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella and Klebsiella Pneumoniae.

### Contents

Design Considerations	<b>h4</b>
Switches	<b>h7</b>
Back Boxes	<b>h10</b>
Power Socket Outlets	<b>h12</b>
Control Switches	<b>h15</b>
Ceiling Accessories	<b>h16</b>
New Media™	<b>h17</b>
Design Provisions	<b>h18</b>
Light Reflectance Values	<b>h19</b>
Dry Lining Boxes	<b>h20</b>

Mode® wiring accessory range has been well received since its launch in 2006, with additional socket outlets, fused connection units and more recently 45A switches with white rockers being some of the latest additions to the range.

The Mode® range has recently been expanded to include a range of anthracite grey finished accessories to comply with current Building Regulations Part M.

The modular design is a standard feature of the Mode® range allowing designers and installers unprecedented flexibility in creating dedicated wiring solutions to deal specifically with virtually all wiring requirements.

All Mode® wiring accessories are tested and compliant with all UK and European standards.

All Mode® wiring accessories are covered by a comprehensive 'No Quibble' 20 year guarantee against any fault in materials or manufacture.

### Building Regulations Part M

Part M1 of the Building Regulations refers to the 'Access and Use' of a building and its facilities with Sections 4.25 to 4.30 then refining the use and design considerations of switches, outlets and controls.

Part of the requirements of Part M1 is to aid disabled people within their surroundings, being able to activate a light, socket or control within arms length, for the visually impaired being able to identify the units' position against its surrounding décor, and for the infirm a suitable pull-cord switch to raise the alarm in the event of an emergency.

The Part M™ Range brochure offers suitable solutions to the elements raised in Part M1 (4.25 to 4.30) with anthracite grey accessories contrasting against the high reflective décor used in the majority of today's buildings along with a range of pull-cord switches with alternative cords and bangles.

As well as the Mode® anthracite grey finish accessories, the wide range of Click® moulded, decorative and metal clad accessories offer alternatives to either suit or contrast against the surrounding décor.



## Design Considerations

The key factors that affect the use of switches, outlets and controls are ease of operation, visibility, height and freedom from obstruction.

- A consistent relationship with doorways and corners will further reinforce the ease with which people manipulate switches and controls
- All users should be able to locate a control, know which setting it is on and use it without setting it on and use it without inadvertently changing its setting
- Controls that contrast visually with their surroundings are more convenient for visually impaired people, as are light switches that are activated by a large push pad
- It is also an advantage if individual switches on panels and on multiple socket outlets are well separated, or in the form of large touch plates, to avoid the inadvertent selection of an adjacent control by visually impaired people and people with limited dexterity



## Pull Cord Provisions

- Where wall mounted switches cannot be provided, i.e. bathrooms and toilets, lighting pull cords are recommended. A 50mm bangle visually contrasting with its background needs to be fitted between 900mm and 1100mm above the floor.
- For emergency alarms systems the pull cord and bangle needs to be coloured red and located as close to a wall as possible. Two bangles are to be fitted, one set at 100mm and the other set between 800mm and 1000mm above the floor.





# Switches

## 10AX Plate Switches (Modular)

All 10AX plate switches feature individual switch modules all fully interchangeable between plastic and metal ranges - thus providing optimum flexibility in wiring.



The products illustrated in this section of the catalogue are finished plates and unfurnished mounting plates.

For comprehensive information on the full range of modules available please refer to our Minigrd™ product brochure.



CMA011AG



CMA012AG



CMA013AG



CMA811AG



CMA812AG



CMA813AG

**MINIGRID®** For the complete range of Minigrd™ modules, see the dedicated Minigrd™ section, page j18.

### Plates Switches - MiniGrid™

- CMA011AG** 10AX 1 Gang 2 Way Plate Switch
- CMA012AG** 10AX 2 Gang 2 Way Plate Switch
- CMA013AG** 10AX 3 Gang 2 Way Plate Switch

Polar™ white switch modules fitted, interchangeable with Minigrd™ modules

### Wide Rocker Switches - Non Modular

- CMA811AG** 10AX 1 Gang 2 Way Wide Rocker Switch
- CMA812AG** 10AX 2 Gang 2 Way Wide Rocker Switch
- CMA813AG** 10AX 3 Gang 2 Way Wide Rocker Switch

Standards: BS EN 60669  
 Back Box Depth: 16mm Minimum Cable Size: 4 x 1.5mm<sup>2</sup> / 2 x 2.5mm<sup>2</sup> / 1 x 6mm<sup>2</sup> Maximum  
 Dimensions: 1 Gang: (86mm x 86mm x 9.5mm)




CMA401AG



CMA402AG



CMA403AG

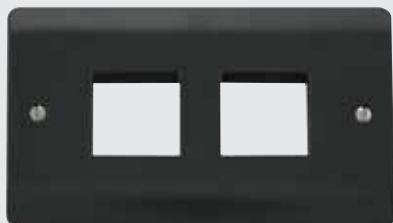

CMA404AG



CMA426AG

**MINIGRID®** For the complete range of Minigrd™ modules, see the dedicated Minigrd™ section, page j18.

**Unfurnished Plates - MiniGrid™**

- CMA401AG** 1 Gang MiniGrid™ Unfurnished Plate - 1 Aperture
- CMA402AG** 1 Gang MiniGrid™ Unfurnished Plate - 2 Apertures
- CMA403AG** 1 Gang MiniGrid™ Unfurnished Plate - 3 Apertures
- CMA404AG** 2 Gang MiniGrid™ Unfurnished Plate - 2 x 2 Apertures
- CMA426AG** 2 Gang MiniGrid™ Unfurnished Plate - 6 In-Line Apertures

Switch modules interchangeable with Minigrd™ modules

Back Box Depth: Dependant on module used  
 Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), 2 Gang: (146mm x 86mm x 9.5mm)



VPAG518



VPAG512



**MINIGRID®**

The furnished plate shown here contains a selection of both single and twin width Minigrd™ modules. The yoke 'GR100' is required to mount the Minigrd™ modules into prior to assembling the frontplate.

**MINIGRID®** The 6 aperture yoke GR100PW utilises Polar™ white Minigrd™ modules. Switch modules are interchangeable with Minigrd™ modules, see page j18. For the complete range of Minigrd™ modules, see the dedicated Minigrd™ section.

**2 Tier Unfurnished Plates - MiniGrid™**

- VPAG512** 2 Tier MiniGrid™ Unfurnished Plate c/w Gaskets - 12 Apertures - Part M™

**3 Tier Unfurnished Plates c/w Gaskets - MiniGrid™**

- VPAG518** 3 Tier MiniGrid™ Unfurnished Plate c/w Gaskets - 18 Apertures - Part M™

Back Box Depth: 47mm Minimum  
 Dimensions: 12 Module: (146mm x 146mm x 8mm) 18 Module: (146mm x 227mm x 8mm)



Example of yoke furnished with modules



GR100



WA512



WA518

**MINIGRID®** Galvanised steel back boxes supplied for flush mounting of the large Minigrad™ plates. Mounting yoke facilitates pre-assembly of required modules. Fitted with twin earth terminals.

**Yokes**

- GR100BK MiniGrid™ Module Yoke - 6 Apertures - Black
- GR100PW MiniGrid™ Module Yoke - 6 Apertures - White

Yokes & recommended ranges: Polar™ white - Part M Range™

**Galvanised Steel Back Boxes**

- WA512 2 Tier 47mm Deep K.O. Box
- WA518 3 Tier 47mm Deep K.O. Box

Dimensions: WA512: 137mm x 137mm WA518: 137mm x 197mm

# Power Socket Outlets, Fused Connection Units & Control Switches

All Part M™ 13A sockets and fused connection units are tested and approved to BS1363 offering assured quality and safety.

The provision of large twin earth terminals on our Two Gang sockets and fused connection units greatly facilitates wiring and installation

The Part M™ range offers a solution for almost every possible design need and will enhance the décor of any area whether in a kitchen, bedroom, lounge or study etc...



13A Wall Socket Outlets | Fused Connection Units | DP Switches



CMA035AG / CMA1035AG



CMA836AG / CMA1836AG



CMA835AG / CMA1835AG



CMA840AG / CMA1840AG

**Switched Socket Outlets**

- CMA035AG** 13A 1 Gang DP Switched Socket
- CMA835AG** 13A 1 Gang DP Switched Socket With Neon
- CMA836AG** 13A 2 Gang DP Switched Socket With Outboard Rockers (Twin Earth)
- CMA840AG** 13A 2 Gang DP Switched Socket With Neons & Outboard Rockers (Twin Earth)

**Safety Shutter Socket Outlets**

- CMA1035AG** 13A 1 Gang DP 3 Pin Safety Shutter Switched Socket
- CMA1835AG** 13A 1 Gang DP 3 Pin Safety Shutter Switched Socket & Neon
- CMA1836AG** 13A 2 Gang DP 3 Pin Safety Shutter Switched Socket With Outboard Rockers (Twin Earth)
- CMA1840AG** 13A 2 Gang DP 3 Pin Safety Shutter Switched Socket With Outboard Rockers & Neons (Twin Earth)

Standards: BS 1363  
 Back Box Depth: 25mm Minimum Cable Size: 4 x 2.5mm<sup>2</sup> / 2 x 4mm<sup>2</sup>  
 Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), 2 Gang: (146mm x 86mm x 9.5mm)



CMA735AG  
Locating socket



CMA736AG  
Locating socket

**Locating Plug Sockets**

- CMA735AG** 13A 1 Gang DP Switched Locating Plug Socket
- CMA736AG** 13A 2 Gang DP Switched Locating Plug Socket With Outboard Rockers (Twin Earth)

Standards: BS 1363  
 Back Box Depth: 25mm Minimum Cable Size: 4 x 2.5mm<sup>2</sup> / 2 x 4mm<sup>2</sup>  
 Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), 2 Gang: (146mm x 86mm x 9.5mm)



CMA771UAG



CMA023AG



CMA651AG



CMA652AG



CMA770AG



CMA780AG



CMA052AG



CMA500AG



CMA501AG

**Switched Sockets With USB Outlets**

- CMA771UAG** 13A 1 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
- CMA770AG** 13A 2 Gang Switched Socket With 2.1A USB Outlet (Twin Earth)
- CMA780AG** 13A 2 Gang Switched Socket With Twin 2.1A USB Outlets (4.2A) (Twin Earth)

Standards: BS1363-2: 2016 + A1: 2018, BS EN 62368-1 and BS EN 62680-1-1  
 Back Box Depth: 25mm Cable Size: 4 x 2.5mm<sup>2</sup> / 2 x 4mm<sup>2</sup>  
 Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), 2 Gang: (146mm x 86mm x 9.5mm)

**20A Control Switches With Optional Flex Outlet Through The Bottom**

- CMA023AG** 20A DP Switch With Neon  
 3 pole and 20A DP switches are non-modular

**Fused Connection Units With Optional Flex Outlet Through The Bottom**

- CMA052AG** 13A Switched Fused Connection Unit With Neon

**Fused Connection Units Without Flex Outlet**

- CMA651AG** 13A Switched Fused Connection Unit
- CMA652AG** 13A Switched Fused Connection Unit With Neon

**45A Switches And Socket Outlets**

- CMA500AG** 45A 1 Gang DP Switch
- CMA501AG** 45A 1 Gang DP Switch With Neon

Standards: 023, 500, 501: BS EN 60669. 651, 652, 052: BS1363-4  
 Back Box Depth: 20A: 25mm min. 45A: 35mm min. Cable Size: 13A: 3 x 2.5mm<sup>2</sup> or 2 x 4mm<sup>2</sup> 45A: 1 x 16mm<sup>2</sup> 20A: 4 x 2.5mm<sup>2</sup>  
 Dimensions: 1 Gang: (86mm x 86mm x 9.5mm)





PRC210AG



PRC216AG



PRW210RD/PRW211RD



PRW208AG



PRW213AG

**Security Screws**

**SP625** Standard M3.5 Security Screw 25mm Long (Bag 100)  
Require 2mm security allen key/driver.



SP625

**Pull Cord Switches**

- PRC210AG** 10AX 2 Way Pull Cord Switch With Grey Bangle
- PRC216AG** 16A DP Pull Cord Switch With Grey Bangle
- PRW208AG** 10A 3 Pole Fan Isolation Pull Cord Switch With Grey Bangle
- PRW210AG** 45A DP Pull Cord Switch With Mechanical 'On/Off' & Neon - Grey Bangle
- PRW210RD** 45A DP Pull Cord Switch With Mechanical 'On/Off' & Neon - Red Bangle
- PRW211AG** 50A DP Pull Cord Switch With Mechanical 'On/Off' & Neon - Grey Bangle
- PRW211RD** 50A DP Pull Cord Switch With Mechanical 'On/Off' & Neon - Red Bangle
- PRW213AG** 50A DP Round Pull Cord Switch With Mechanical 'On/Off', Neon, Pattress & Grey Bangle
- PRW213RD** 50A DP Round Pull Cord Switch With Mechanical 'On/Off', Neon, Pattress & Red Bangle

Standards: BS EN 60669  
Cable Size: 208, 216, PRC210: 2 x 1.5mm<sup>2</sup> / 1 x 2.5mm<sup>2</sup> PRW210: 1 x 16mm<sup>2</sup> 211: 2 x 6mm<sup>2</sup> / 1 x 25mm<sup>2</sup> 213: 2 x 6mm<sup>2</sup> / 1 x 25mm<sup>2</sup>  
Dimensions: PRC210/216: 70mm Dia. x 42mm PRW208: 86mm x 86mm x 43mm  
PRW210/211: 86mm x 86mm x 43mm PRW213: 100mm Dia. x 77mm



CMA310AG



CMA312AG



MM410WH



MM515



MM501WH



MM440WH



CMA311AG



For a complete range of New Media™ modules please see our dedicated New Media™ section.


**Unfurnished Plates - New Media™**

- CMA310AG** 1 Gang New Media™ Unfurnished Plate - 1 Aperture
- CMA311AG** 1 Gang New Media™ Unfurnished Plate - 2 Apertures
- CMA312AG** 2 Gang New Media™ Unfurnished Plate - 4 Apertures

Selecting from a range of module inserts covering all manner of media transfer, the installer will now be able to configure their own arrangement of TV, radio or satellite reception, plus speaker, telephone and data outlets. All modules can be inserted into single or double wall plates, fitted onto standard switch and socket boxes.

All New Media™ plates are suitable for use with standard euro module inserts.

Back Box Depth: Dependant on module used  
Dimensions: 1 Gang: (86mm x 86mm x 9.5mm), 2 Gang: (146mm x 86mm x 9.5mm)

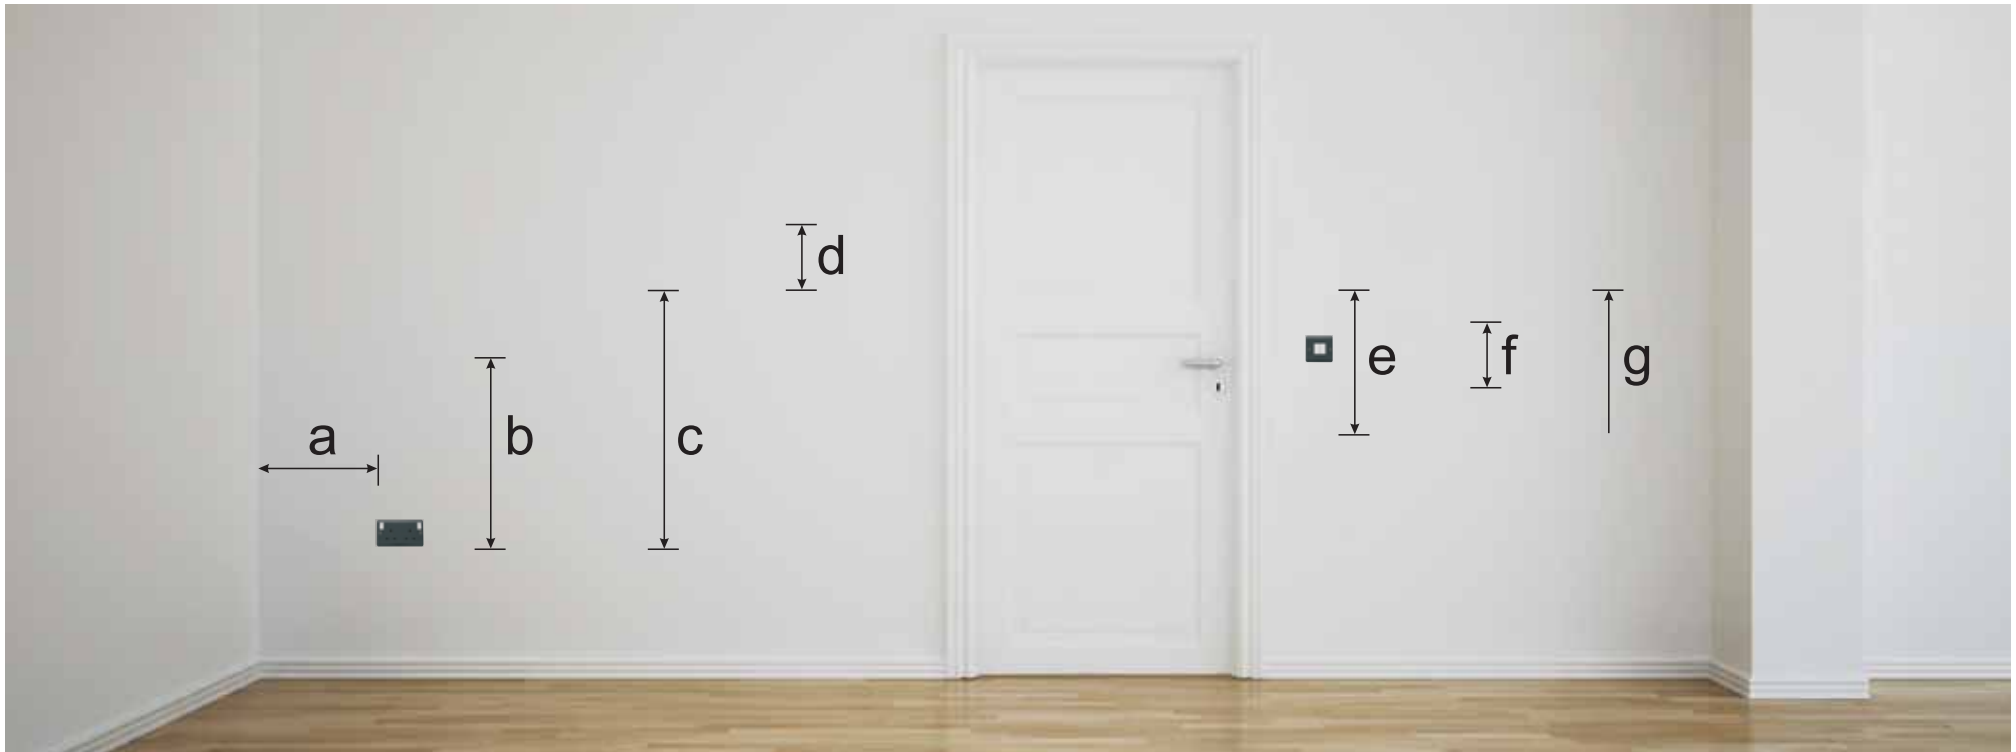

## Provision For Meeting The Design Considerations

Section 4.30 of Part M™ lays out the provisions for satisfying the design considerations.

- a. Socket outlets are located consistently to doorways and room corners, but in any case no nearer than 350mm from room corners.
- b. Wall mounted sockets outlets, telephone, data and TV outlets are located between 400mm and 1000mm above the floor, with a preference for the lower end of the range.
- c. Switches for permanently wired appliances are located between 400mm and 1200mm above the floor, unless needed at a higher level for particular appliances.
- d. Controls that need close vision are located between 1200mm and 1400mm above the floor, so that readings may be taken by a person sitting or standing.
- e. All switches that require precise hand movements are located between 750mm and 1200mm above the floor.
- f. Light switches for use by the general public have large push pads and align with door handles within the range 900mm to 1100mm, for ease of location when entering a room.
- g. Simple push button controls that require limited dexterity are not more than 1200mm above the floor.

Range	LRV	
CMA***AG	8.9	Anthracite Grey Range
CMA***	74.3	Mode® Range
PRW***	74.3	Polar™ Range
CCA***	74.3	Curva® Range
WA***	83.6	Accessories White Range
CL***	37	Metal Clad Range
WA***RD	15.3	Red Range
BA***	59.6	Beige Range

### GridPro®, Minigrid™ & New Media™ Modules

Finish	LRV	
PW	74.3	Polar™ White
WH	83.6	Accessories White
BK	4.9	Black
RD	15.3	Red

### Decorative Finishes

Finish	LRV	
AB*	34.1	Antique Brass
BN*	18.4	Black Nickel
PN*	43.3	Pearl Nickel
SB*	66.9	Satin Brass
SC*	38.3	Satin Chrome
SS*	49.8	Stainless Steel

LRV values for finishes with \* should be used with caution as the gloss level on these can give inaccurate results depending on lighting and or viewing conditions.

Part M™ Section 0.26 indicates that the visual perception of one element of the building, or fitting within the building against another has a greater light reflectance value difference of 30 points, where black = 0 points and white = 100 points. Where illuminance on surfaces is greater than 200 LUX a difference in light reflectance value should be a minimum of 20 points.

Example: Anthracite grey (LRV 8.9) on a brilliant white background (LRV 100) gives a contrast of 91.1 points which complies with Part M™.

Section 4.30 '(m) frontplates contrast visually with their backgrounds'. This requirement is open to interpretation, with one being the complete product contrasting against its background and another with the switch contrasting against its frontplate. The Part M™ range of products satisfies both.

The contrast values are stipulated within - Design guidance for internal built environments - Reading University.

The information relayed in this brochure is for guidance only, with the specifier or contractor having the responsibility of selecting the products which comply with Part M™ and ensuring they are installed and positioned to meet the regulations.



WA095



WA102



WA106P



WA107P



GA100



WA4247

essentials™ For the complete range of back boxes see Essentials™ page m4.  
For the complete range of FlameGuard® back boxes see Essentials™ page m8.

**Galvanised Steel Back Boxes**

- WA092** 1 Gang 16mm Deep Galvanised Steel K.O. Box
- WA093** 1 Gang 25mm Deep Galvanised Steel K.O. Box
- WA094** 2 Gang 25mm Deep Galvanised Steel K.O. Box
- WA095** 1 Gang 35mm Deep Galvanised Steel K.O. Box
- WA096** 2 Gang 35mm Deep Galvanised Steel K.O. Box
- WA097** 1 Gang 47mm Deep Galvanised Steel K.O. Box
- WA098** 2 Gang 47mm Deep Galvanised Steel K.O. Box
- WA099** 1 + 1 35mm Deep Dual Accessory Box
- WA102** 1 + 2 35mm Deep Dual Accessory Box

**'Ezylink' Dry Lining Box Connector**

- GA100** 'Ezylink' Dry Lining Box Connector

**Dry Lining Boxes**

- WA087P** 1 Gang 35mm Deep Dry Lining Box
- WA088P** 2 Gang 35mm Deep Dry Lining Box
- WA106P** 1 Gang 47mm Deep Dry Lining Box
- WA107P** 2 Gang 47mm Deep Dry Lining Box
- WA108P** Round Ceiling 34mm Deep Dry Lining Box

**FlameGuard® Dry Lining Boxes**

- WA4135** 1 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4235** 2 Gang 35mm Deep FlameGuard® Dry Lining Box
- WA4147** 1 Gang 47mm Deep FlameGuard® Dry Lining Box
- WA4247** 2 Gang 47mm Deep FlameGuard® Dry Lining Box