



10A 3 Pole Fan Isolation Switch Modules



MINIGRID™ modules are fitted as standard into our moulded POLAR™ & MODE®, decorative DEFINITY™, DEFINE® DECO® and Metal Clad ranges. The MINIGRID™ modules are all easily and quickly exchanged or mounted onto unfurnished plates by means of a simple single screw fixing.

10A 3 Pole Fan Isolation Switch Modules

Product Range

Finish Comparison



Antique Brass (AB)



Polished Brass (BR)



Polished Chrome (CH)



Click White (WH)



Satin Chrome (SC)



Satin Brass (SB)



Black Nickel (BN)



Polar White (PW)



Pearl Nickel (PN)



Stainless Steel (SS)



Brushed Steel (BS)



Black (BK)

Errors & Omissions excluded. Specification is subject to change without notice. MD220 Available in WH, BK & PW Finishes Only.

10A 3 Pole Fan Isolation Switch Modules

Product Range

10A 3 Pole Fan Isolation Switch Modules

MD020**

10A 3 Pole Fan Isolation Switch

MD220**

10A 3 Pole Fan Isolation Switch (Lockable)



MD020SC




MD220PW




MI003 Supplied

10A 3 Pole Fan Isolation Switch Modules

Product Dimensional Drawings (mm)

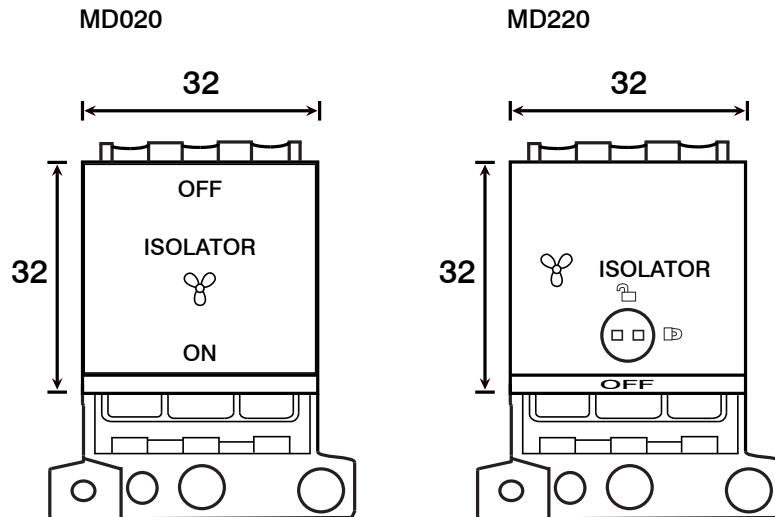

Wiring Diagram

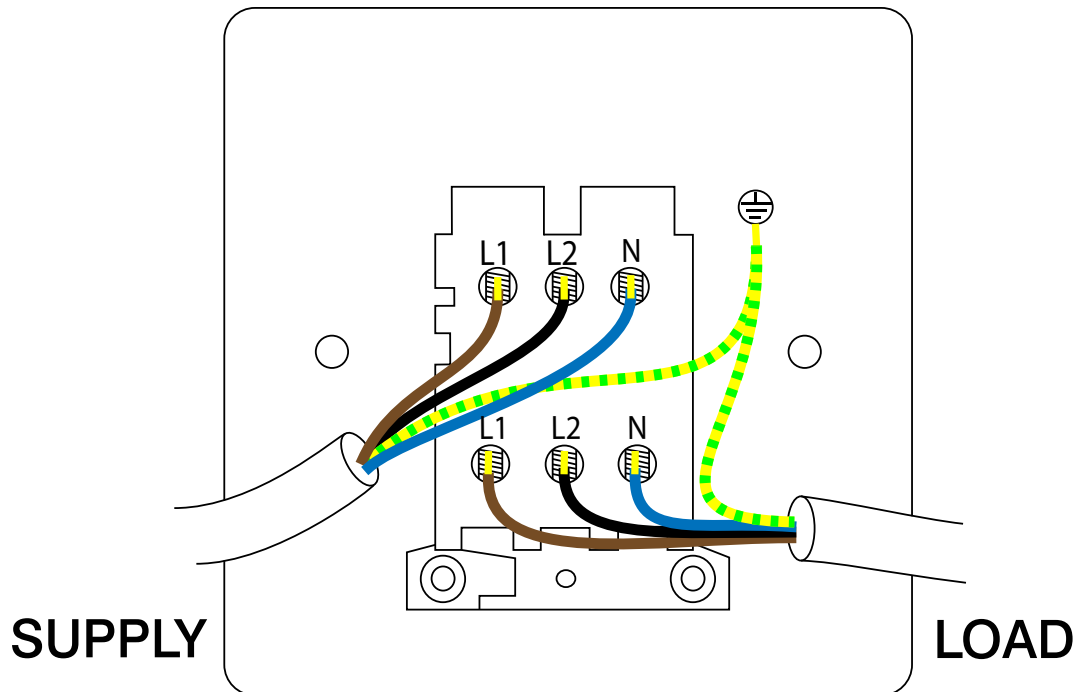

10A 3 Pole Fan Isolation Switch Modules

Technical Specification

10A 3 Pole Fan Isolation Switch Modules

Material Composition	Rocker Switch: Urea or Urea + Stainless Steel Cover (Ingot) Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated Silver “on-lay” Copper / Brass Contacts
Voltage	240V~ 50Hz
Current Rating	10A
Terminal Size	3.5mm ø
Torque Value	0.4Nm
Cable Size	4 x 1.5mm ² or 2 x 2.5mm ²
Back Box Depth	16mm - 47mm (Dependant on Mounting Plate Used)
Modular	Yes
Warranty	10 Years
Anti Microbial Certified	Yes (Non Ingot Switches Only)
IP Rating	IP20
Operational Temperature	-5° to +40°C
Standards	The Low Voltage Directive 2006/95/EC BS EN 60669-1:1999 + A1:2002 + A2:2008 Modified ISO 22196

Additional Information

Ensure that the mains supply is isolated before commencing installation.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.



DECLARATION OF CONFORMITY

- 1. *Issuer Name* Scolmore International Limited
- 2. *Issuer Address* 1 Scolmore Park, Landsberg,
Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7XB
- 3. *Object(s) of Declaration* MINIGRID Range
 - a. *Group* 10A 3 Pole Fan Isolation Switch Modules
 - b. *Model No.* MD020, MD220

4. *The object of the declaration described above is in conformity with the requirements of the following Legislations:*

Document No	Title
2006/95/EC	Low Voltage Directive

5. *All products contained within the aforementioned comply with the relevant standards and requirements listed below.*

EN 60669-1:1999 + A1:2002 + A2:2008

6. *I hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The unit complies with all applicable Essential Requirements of the Directives.*

In conjunction with the above all manufacture and process controls are in accordance with ISO 9001:2008

Signed, for and on behalf of: Scolmore International Limited

Steven Bettson BSc - Senior Technical Support Engineer

