


# Technical Specification

**Product Code:** VPBN771BK

**Description:** 13A 1 Gang Switched Socket Outlet With Single 2.1A USB Outlet

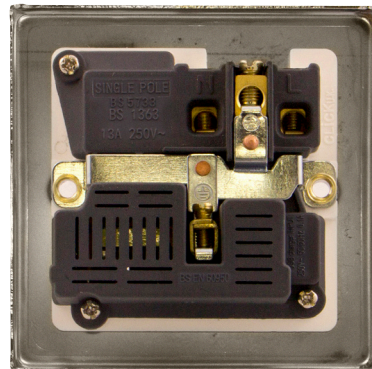

## General Information

<b>Dimensions</b>	88mm (W) x 88mm (H) x 8mm (D)	
<b>Dimensions With Gasket</b>	91mm (W) x 91mm (H) x 9mm (D)	
<b>Plate Design &amp; Finish</b>	Victorian Black Nickel	
<b>Insert &amp; Gasket Colour</b>	Black	
<b>Materials</b>	Front Plate: Stainless Steel Housing: Nylon Terminal Screws: Steel & Yellow Passivated Internal Busbars: Formed Pressed Brass Earth Strap: Mild Steel	Insert & Rocker Switch: Urea Terminals: Brass Contacts: Silver "on-lay" Copper / Brass PCB: Mixed Components Gasket: Nylon
<b>Maximum Voltage</b>	250V~ 50Hz	
<b>Load Rating</b>	13A	
<b>Plate Fixing Centres</b>	60.3mm	
<b>Terminal Size</b>	5mmø	
<b>Terminal Torque</b>	2.5Nm	
<b>Terminal Capacity</b>	3 x 2.5mm <sup>2</sup> or 2 x 4mm <sup>2</sup>	
<b>Single Pole</b>	Yes	
<b>Twin Earth Terminals</b>	Yes	
<b>USB Charging Output Total</b>	5V DC, 2.1A	
<b>Number Of USB Outputs</b>	1	
<b>USB Type</b>	USB Type "A"	
<b>USB Standby Current</b>	2mA	
<b>Product Markings</b>	USB 5V 2.1A	
<b>Ingress Protection</b>	IP20	
<b>Back Box Depth</b>	35mm Minimum	
<b>Termination Type</b>	Screw	
<b>Operational Temperature</b>	-5°C to +40°C	
<b>Warranty</b>	10 Years, 1 Year Electronics	
<b>Standards</b>	BS 1363-2: 2016 +A1: 2018 BS EN 62368-1: 2014, BS EN 62680-1-1: 2015	

## Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.  
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.